


Gniazdo Hermetyczne OYSTER™ IP66

IP 66 UV Br Ci

GNIAZDO WTYCZKOWE W OBUDOWIE HERMETYCZNEJ OYSTER IP66™, SZARY 2P+Z 16A 250V 100x100x73

Typ	Kolor	Opak. szt.	Waga kg/1 szt.	Indeks
GNT 2P+Z	Szary RAL 7035	1 szt. / 1 karton 8 kartonów / 1 karton zbiorczy	0,29	6185-00

- Prąd znamionowy 16A
 - Napięcie znamionowe 250V
 - Stopień ochrony IP 66
 - RAL 7035
 - 3 gwintowane zaślepki z uszczelkami – wymienne na 1x M25x1,5 oraz 2x M20x1,5.
 - W zestawie wkręty z kołkami rozporowymi to montażu w ścianie
 - Możliwość instalacji bez konieczności rozkręcania obudowy na tzw. blaszki montażowe
 - Montaż natynkowy
 - Transparentna uchylna (pod kątem 90 stopni) klapka
 - Zaciski śrubowe
 - IK07
 - Szczelne zamknięcie klapki po podłączeniu wtyczki
- Wymiary: 100x100x73mm

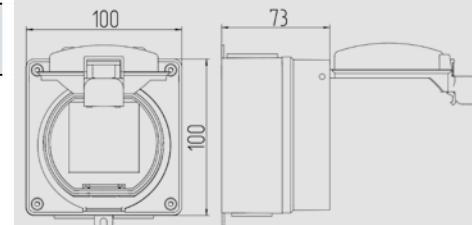

Hermetic socket OYSTER™ IP66

IP 66 UV Br CI

OYSTER™ 2P+Z 16A 250V 100x100x73

Type	Color	Packaging	Weight kg/1 pcs.	Index
GNT 2P+Z	Grey RAL 7035	1 pcs./1 box 8 boxes /1 carton	0,29	6185-00

- Rated current 16A
 - Rated voltage 250V
 - Ingress protection IP 66
 - RAL 7035
 - 3 screw plugs with O-rings, easy to swap for glands: 1x M25x1,5 and 2x M20x1,5.
 - Wall plug's with screws kit
 - Possibility of installation on mounting brackets (without opening the housing)
 - Surface mounting
 - Socket with screw terminals
 - Transparent flap opens up to 90°
 - Impact protection: IK07
 - Tight closure after inserting the plug
- Dimensions: 100x100x73mm

